



ProFiL Rotors TQ

Premium parts ProFiL Rotors TQ 933 BD/TQ M33 BD

Application range

- Any application where rotors with T-groove of 33 and 34 mm are in use
- All field tests were performed with 100% cotton (for T-rotors with a diameter of 34 mm and smaller, a washer with 1.5 mm is required underneath the navel)

Available types


TQ 933 BD (hybrid bearing)
TQ M33 BD (magnetic bearing)

Compatibility

from SE 9 to SE 12, SC-M and SQ9

OUTSTANDING

ADVANTAGES

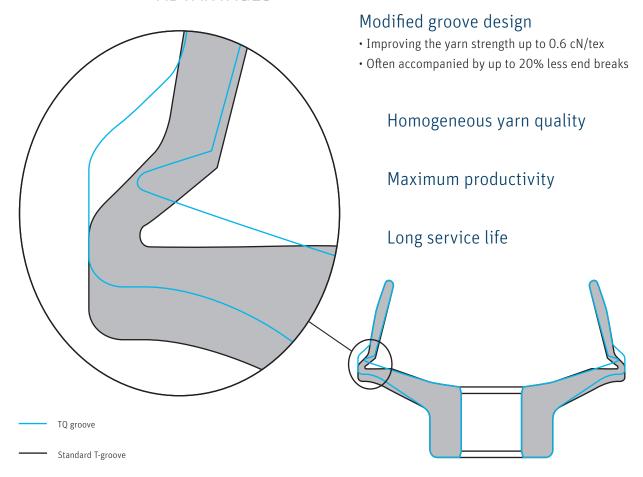

Spindelfabrik Suessen GmbH

Donzdorfer Straße 4 73079 Süssen Germany T +49 7162 15-0 F +49 7162 15-367 mail@suessen.com The data and illustrations in this brochure and on the corresponding data carrier refer to the date of printing. Suessen reserves the right to make any necessary changes at any time and without special notice. Suessen systems and Suessen innovations are protected by patents.